

REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/02/15

客户编码






XX-XXX

**Electrical Data:**

Current rating: 2 Amps  
 Dielectric Withstanding Voltage: 500VAC  
 for one minute  
 Contact Resistance: < 20 mΩ  
 Insulation Resistance: > 1000 MΩ  
 Operating Temperature: -40°C ~ +105°C

**Construction:**

Insulator: Black Glass Filled Polyester  
 Flammability Rating: UL 94V-0  
 Contacts: Phosphor Bronze of copper alloy  
 Contacts plating: Selective gold on surface contact area  
 Standard: PA6T

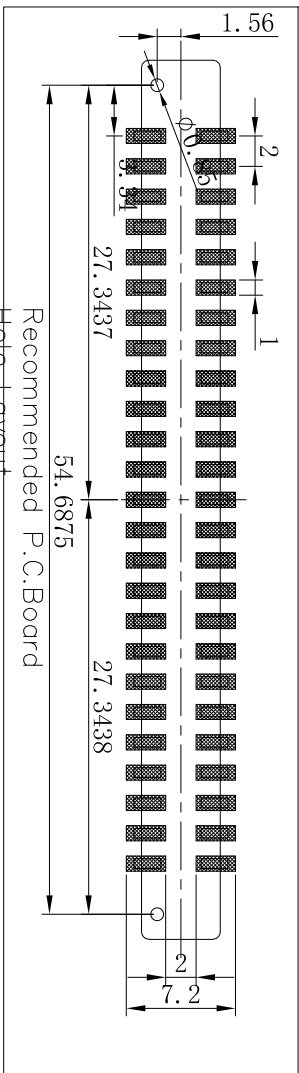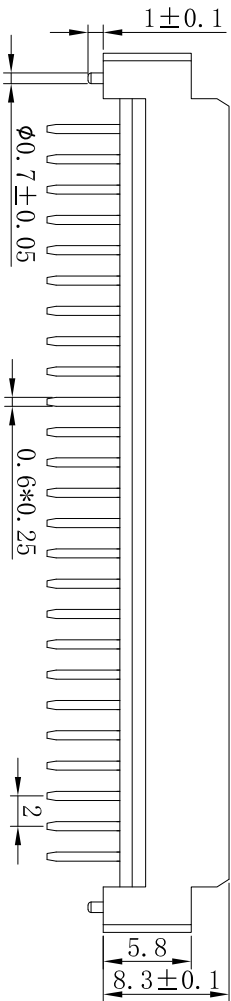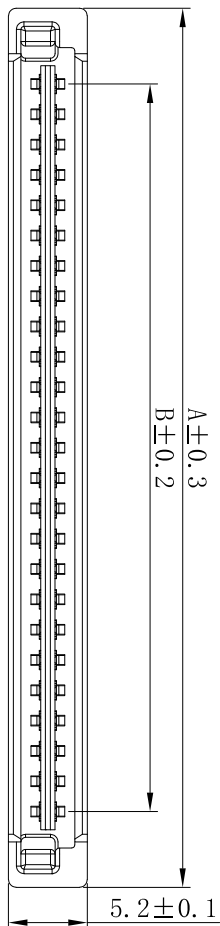

Recommended P.C.Board Hole layout

- 备注:
- 1、A= 2.0 X No. of Positions + 8
  - 2、B= 2.0 X No. of Contacts - 2.0
  - 3、胶壳用常规标准胶壳, 2XNo. of Contacts
  - 4、材质: PA6T 颜色: 黑色
  - 5、端子底层镀锡30~60 μ“; 表面镀雾锡80 μ“ “接触区镀金1 μ“
  - 6、胶壳材质必须能过回流焊, 及回流焊过程中不脱落及融合



深圳市新世联电子有限公司  
 TEL: +86 (755) 29912370 FAX: 29912372

Tolerance Unless otherwise Specified		Title		Units		Scale		REV NO.		Material No.	
.X	±0.30	⊙	板对板2.0mm 母端座 180度	mm	2:1	V0	XXXXX-XXXXX-XXX-XX				
.XXX	±0.20	∠						Reviewed By	Date	Approval By	Date
Angle	± 3°							LiuYang	2023/02/15		