
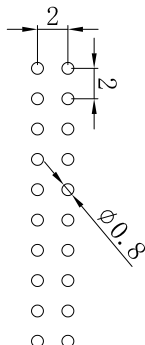
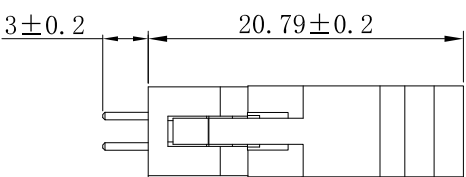
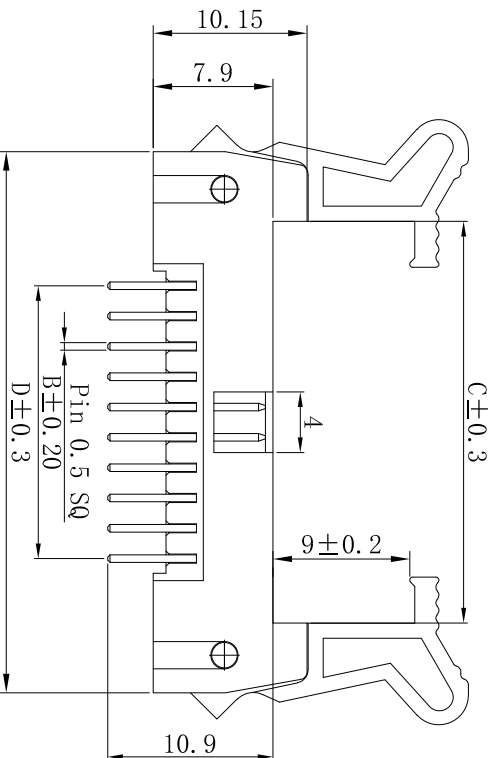


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/02/15

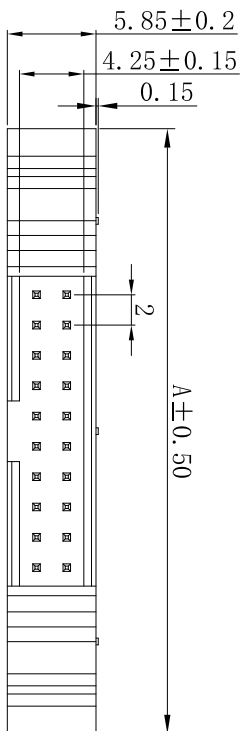

Recommended P.C.Board
Layout

Electrical Data:

Current rating: 2Amps
 Dielectric Withstanding Voltage: 500VAC
 for one minute
 Contact Resistance: < 30 mΩ
 Insulation Resistance: > 1000 MΩ
 Operating Temperature: -40°C ~ +105°C

Construction:

Insulator: Black Glass Filled Polyester
 Flammability Rating: UL 94V-0
 Contacts: Phosphor Bronze of copper alloy
 Contacts plating: Selective gold on surface contact area

Standard: Nylon-6T

- 备注:
- 1、A= 2.00 X No. of Positions + 19.92
 - 2、B= 2.00 X No. of Contacts - 2.00
 - 3、C= 2.00 X No. of Contacts + 6.5
 - 4、D= 2.00 X No. of Contacts + 15.7
 - 4、胶壳用常规标准胶壳, 2xNo. of Contacts
 - 5、材质: PA6T 颜色: 黑色
 - 6、方针表层镀金
 - 7、胶壳材质必须能过回流焊, 及回流焊过程中不脱落及融合

<p>Http://www.ciscom.com</p>		<p>深圳市新世联电子有限公司</p> <p>TEL: +86 (755) 29912370 FAX: 29912372</p>	
Tolerance Unless Otherwise Specified	Title	牛角2.0mm 双排 180度 高耳	
.X ~ ±0.30		Units	Scale
.XX ~ ±0.25		mm	2:1
.XXX ~ ±0.20		Date	REV NO.
Angle ~ ± 3°		2023/02/15	V0
	Drawing By	Reviewed By	Material No.
	LiuYang		XXXXX-XXXXX-XXX-XX
			Approval By
			Date