
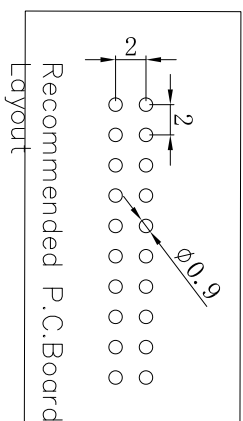
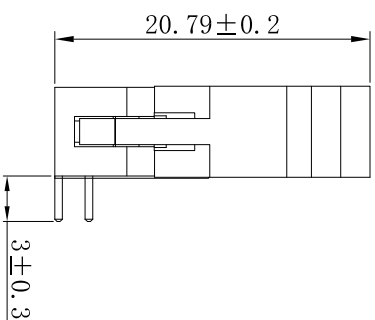
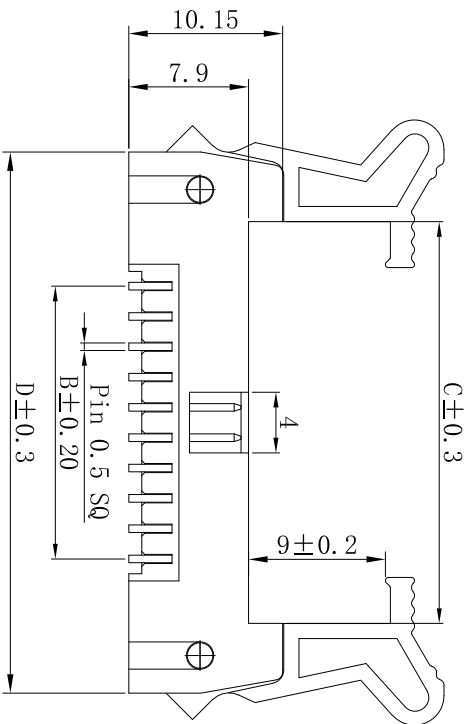


| REV. NO. | REVISION NOTE | REVISER | DATE       |
|----------|---------------|---------|------------|
| V0       | NEW DRAWING   |         | 2023/05/26 |

客户编码

XX-XXX

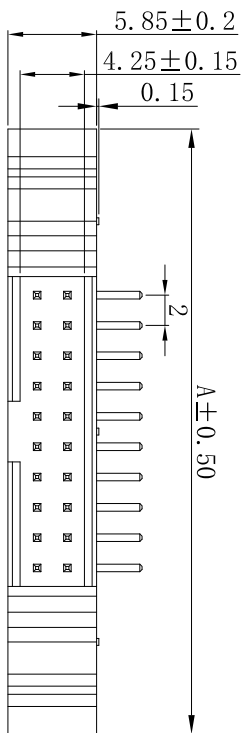

**Electrical Data:**

Current rating: 2Amps  
 Dielectric Withstanding Voltage: 500VAC for one minute  
 Contact Resistance: <math>< 30 \Omega</math>  
 Insulation Resistance: > 1000 M $\Omega$   
 Operating Temperature: -40°C ~ +105°C

**Construction:**

Insulator: Black Glass Filled Polyester  
 Flammability Rating: UL 94V-0  
 Contacts: Phosphor Bronze of copper alloy  
 Contacts plating: Selective gold on surface contact area

Standard: Nylon-6T

- 备注:
- 1、A= 2.00 X No. of Positions + 19.92
  - 2、B= 2.00 X No. of Contacts - 2.00
  - 3、C= 2.00 X No. of Contacts + 6.5
  - 4、D= 2.00 X No. of Contacts + 15.7
  - 4、胶壳用常规标准胶壳, 2xNo. of Contacts
  - 5、材质: PA6T 颜色: 黑色
  - 6、方针表层镀金
  - 7、胶壳材质必须能过回流焊, 及回流焊过程中不脱落及融合



深圳市新世联电子有限公司  
 TEL: +86 (755) 29912370 FAX: 29912372

|                                      |              |                   |            |             |      |             |      |         |  |                 |  |
|--------------------------------------|--------------|-------------------|------------|-------------|------|-------------|------|---------|--|-----------------|--|
| Http://www.ciscom.com                |              | Title             |            | Units       |      | Scale       |      | REV NO. |  | Material No.    |  |
| Tolerance Unless Otherwise Specified |              | 牛角2.0mm 双排 90度 高耳 |            | mm          |      | 2:1         |      | V0      |  | XXXX-XXXX-XX-XX |  |
| .X ~ ±0.30                           | .XX ~ ±0.25  | Drawing By        | Date       | Reviewed By | Date | Approval By | Date |         |  |                 |  |
| .XXX ~ ±0.20                         | Angle ~ ± 3° | LiuYang           | 2023/05/26 |             |      |             |      |         |  |                 |  |