
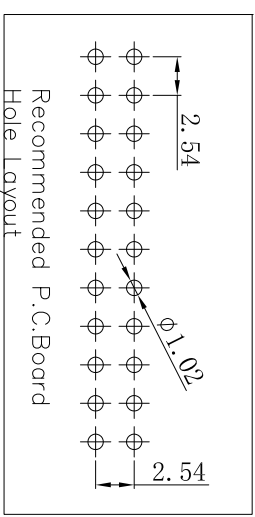
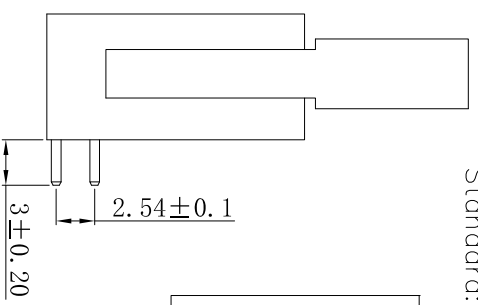
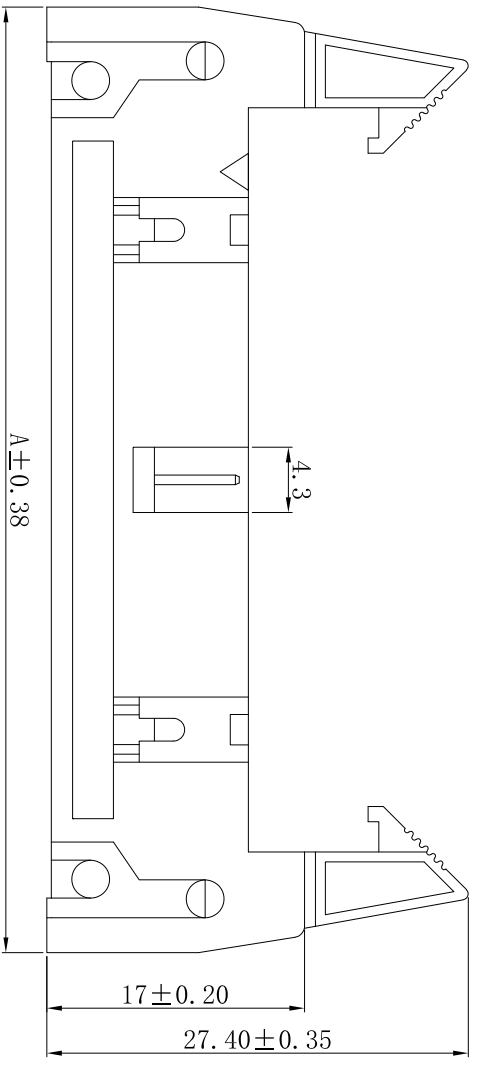


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/02/15

客户编码	XX-XXX
------	--------

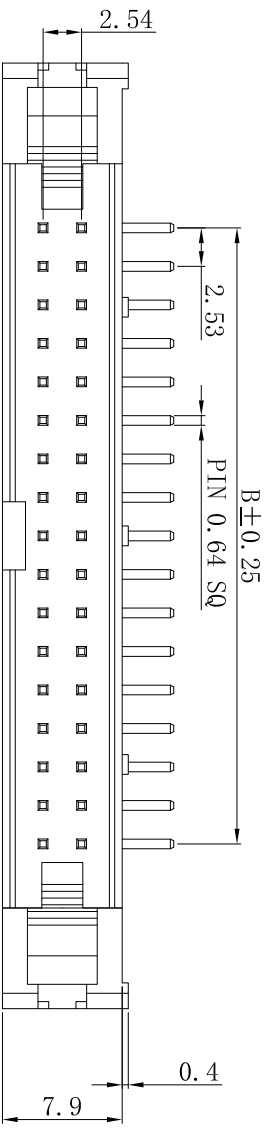

Electrical Data:
 Current rating: 3Amps
 Dieltric Withstanding Voltage: 1000VAC for one minute
 Contact Resistance: < 20 mΩ
 Insulation Resistance: > 1000 MΩ
 Operating Temperature: -20°C ~ +105°C

Construction:
 Insulator: Black Glass Filled Polyester
 Flammability Rating: UL 94V-0
 Contacts: Phosphor Bronze of copper alloy
 Contacts plating: Selective gold on surface contact area
 Standard: PBT

- 备注:
- 1、A= 2.54 X No. of Positions+19.16
 - 2、B= 2.54 X No. of Contacts - 2.54
 - 3、胶壳用常规标准胶壳, 2xNo. of Contacts
 - 4、材质: PBT 颜色: 黑色
 - 5、方针表层镀金0.8U

Http://www.cisconn.com				深圳市新世联电子有限公司 TEL: +86 (755) 29912370 FAX: 29912372	
Tolerance Unless Otherwise Specified	Title	Units	Scale	REV NO.	Material No.
.X ~ ±0.30		mm	2:1	V0	XXXX-XXXX-XX-XX
.XX ~ ±0.25					
.XXX ~ ±0.20					
Angle ~ ± 3°					
Drawing By	Date	Reviewed By	Date	Approval By	Date
LiuYang	2023/02/15				