
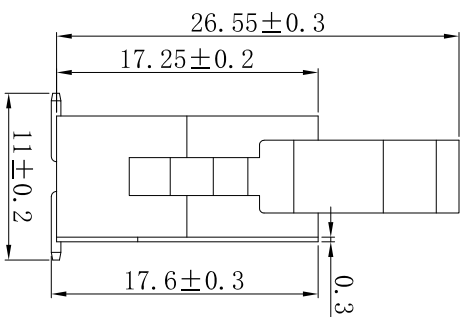
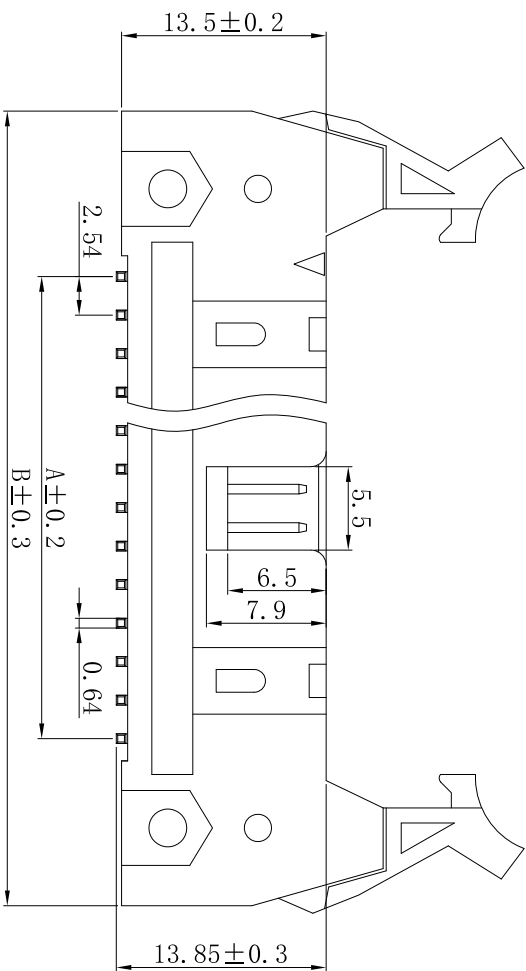


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/02/15

客户编码


XX-XXX

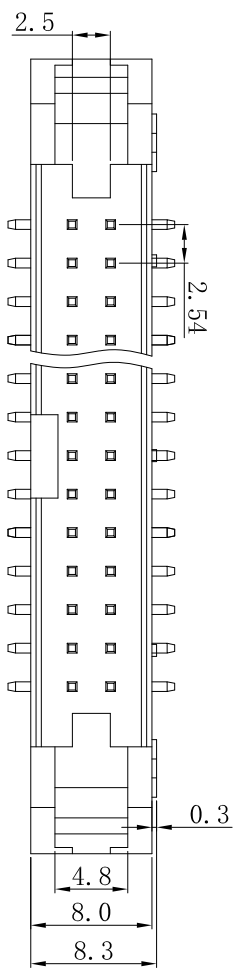

Electrical Data:
 Current rating: 3Amps
 Dielectric Withstanding Voltage:
 1000VAC for one minute
 Contact Resistance: < 20 mΩ
 Insulation Resistance: > 1000 MΩ
 Operating Temperature: -40°C ~ +105°C

Construction:

Insulator: Black Glass Filled Polyester
 Flammability Rating: UL 94V-0
 Contact Material: Brass
 Contacts plating: Selective gold on surface contact area
 Standard: PA6T
 PA6T soldering temperature resistance up to 260 °C

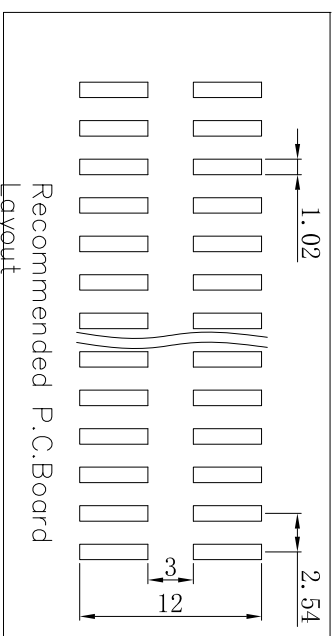

- 备注:
- 1、A= 2.54 X No. of Positions+19.18
 - 2、B= 2.54 X No. of Contacts - 2.54
 - 3、胶壳用常规标准胶壳, 2XNo. of Contacts
 - 4、材质: PA6T 颜色: 灰色
 - 5、表层镀金2U
 - 6、胶壳材质必须能过回流焊, 及回流焊过程中不脱落及融合

Http://www.ciscomn.com				深圳市新世联电子有限公司 TEL: +86 (755) 29912370 FAX: 29912372	
Tolerance Unless Otherwise Specified	Title	牛角2.54mm 双排 立贴 销式			
.X ~ ±0.30		Units	Scale	REV NO.	Material No.
.XX ~ ±0.25		mm	2:1	V0	
.XXX ~ ±0.20	Drawing By	Date	Reviewed By	Date	Approval By
Angle ~ ± 3°	LiuYang	2023/02/15			