
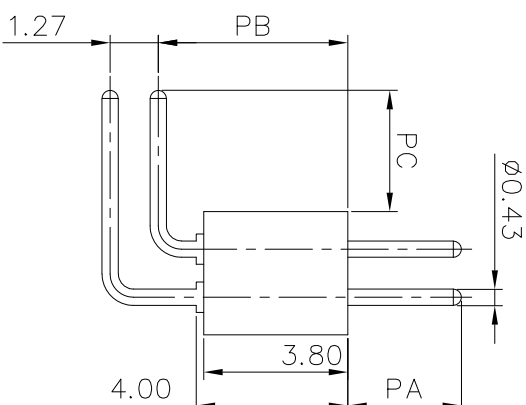
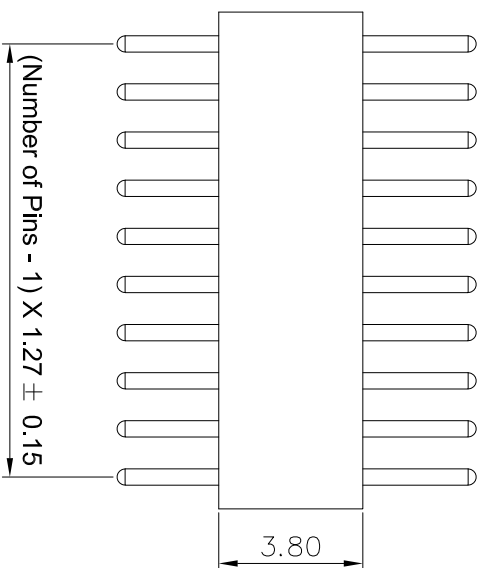


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/05/26

客户编码

XX-XXX

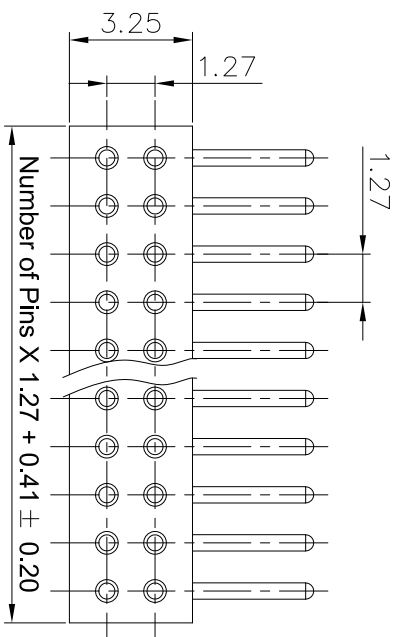

## Technical Data

### Material:

Pin(outer sleeve): Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin plated:2μm/80μ"Ni, 5μm/200μ"Sn

Gold Plated:2μm/80μ"Ni,0.8 μ " gold

Plating(contact): 2μm/80μ"Ni, gold or Tin plated

Insulator(black): PPS (UL94V-0)

### Electrical:

Current rating: 3Amps/contact max.

Contact resistance:  $\leq 4m\Omega$ /contact

Insulation resistance:  $\geq 1000M\Omega$  at V=100V

Operating voltage: 60VAC/DC


### Mechanical:



Mechanical life cycle:min.200

Operating temperatures: Gold Plated:-55°C to+105°C

Tin plated:-40°C to+105°C

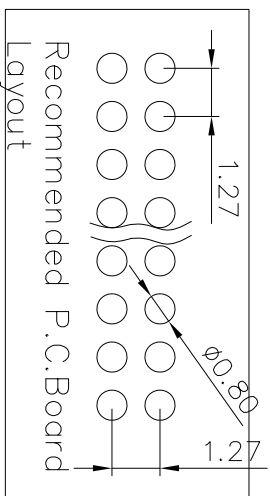Soldering temperature: +260°C,10s max



		深圳市新世联电子有限公司	
Http://www.ciscomm.com		TEL:+86(755)29912370 FAX:29912372	
Tolerance Unless Otherwise Specified			
.X ~ ±0.30	Title	圆孔排母1.27mm 双排 90度 (塑高3.8 塑宽3.25)	
.XX ~ ±0.25		Units	Scale
.XXX ~ ±0.20	Drawing By	mm	1:1
Angle ~ ± 3°	Date	Reviewed By	REV NO.
	LiuYang	2023/05/26	V0
			Material No.
			XXXXX-XXXXX-XXX-XX
			Approval By
			Date