

REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/02/15





客户编码	XX-XXX
------	--------

Electrical Data:


Current rating: 3 Amps
 Dielectric Withstanding Voltage: 500VAC
 for one minute
 Contact Resistance: < 20 mΩ
 Insulation Resistance: > 1000 MΩ
 Operating Temperature: -40°C ~ +105°C

Construction:

Insulator: Black Glass Filled Polyester
 Flammability Rating: UL 94V-0
 Contacts: Phosphor Bronze of copper alloy
 Contacts plating: gold on surface
 Standard: PAGT

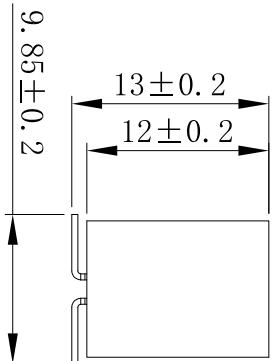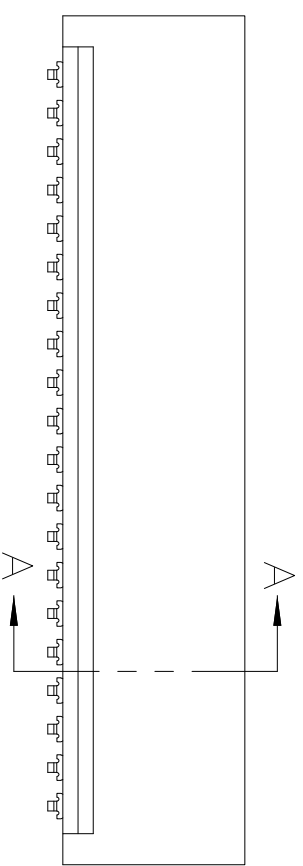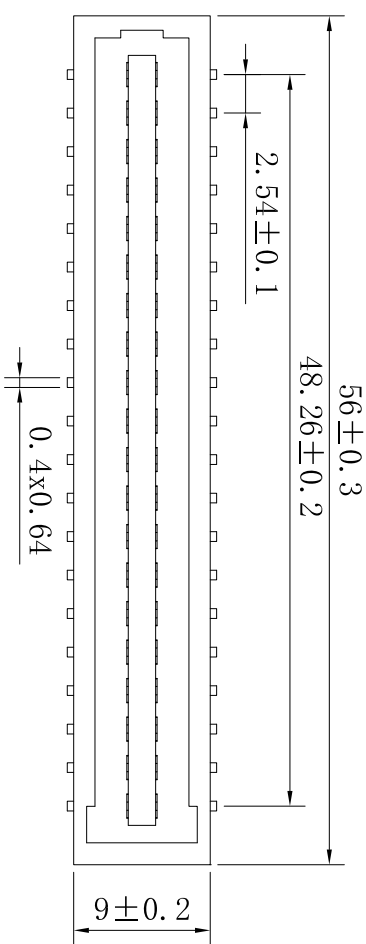

A-A

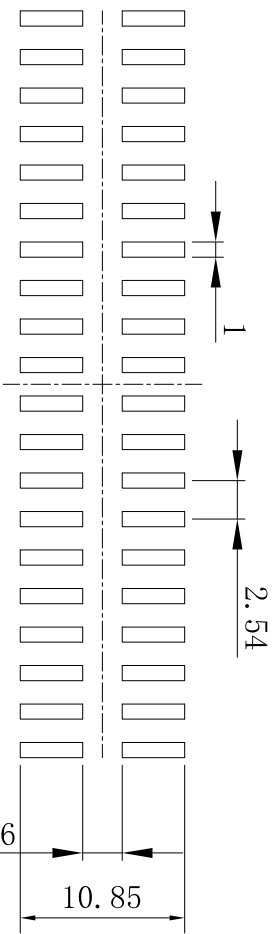

Recommended P.C. Board Hole Layout

Http://www.ciscomn.com 		深圳市新世联电子有限公司 TEL: +86 (755) 29912370 FAX: 29912372	
Tolerance Unless Otherwise Specified	Title	板对板2.54mm 公端座 立贴 (塑高12 塑宽9.0)	
.X ~ ±0.30		Units	Scale
.XX ~ ±0.25		mm	2:1
.XXX ~ ±0.20	Drawing By	Date	REV NO.
Angle ~ ± 3°	LiuYang	2023/02/15	V0
	Reviewed By	Date	Material No.
			XXXXX-XXXXX-XXX-XX
			Approval By
			Date