

REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/02/15

客户编码





XX-XXX

**Electrical Data:**

Current rating: 3 Amps  
 Dielectric Withstanding Voltage: 500VAC  
 for one minute  
 Contact Resistance: < 20 mΩ  
 Insulation Resistance: > 1000 MΩ  
 Operating Temperature: -40°C ~ +105°C

**Construction:**

Insulator: Black Glass Filled Polyester  
 Flammability Rating: UL 94V-0  
 Contacts: Phosphor Bronze of copper alloy  
 Contacts plating: gold on surface  
 Standard: PAGT

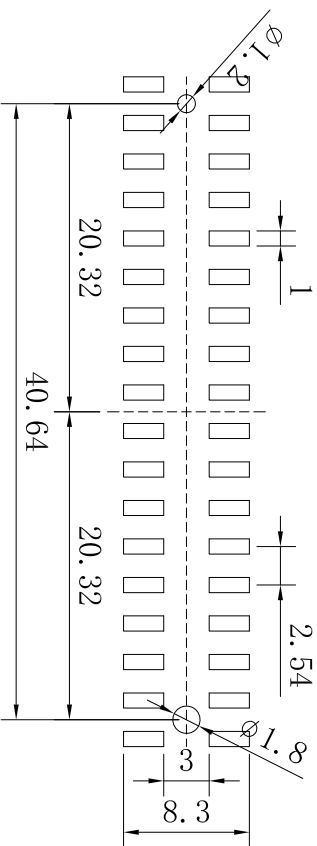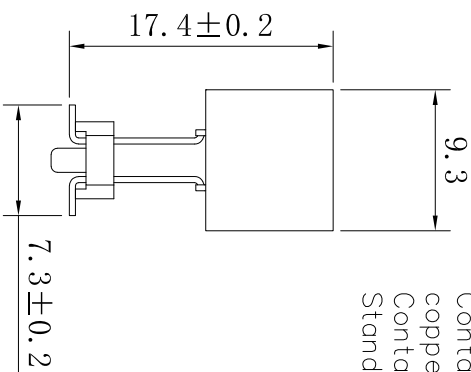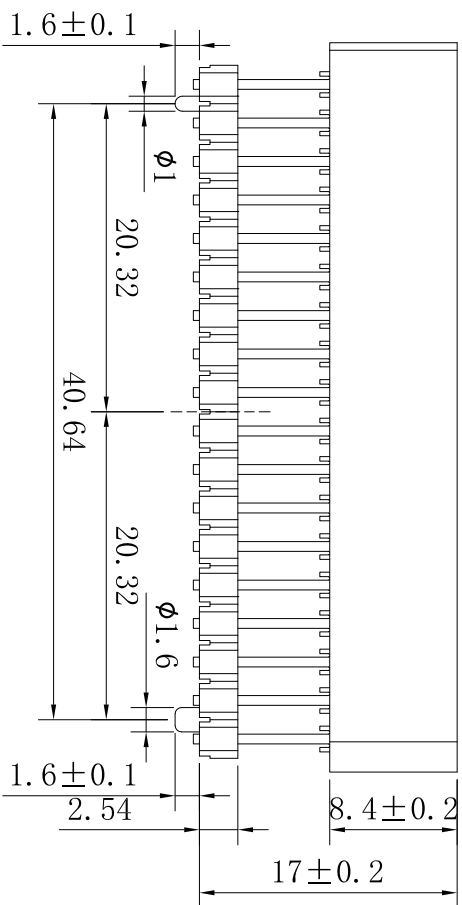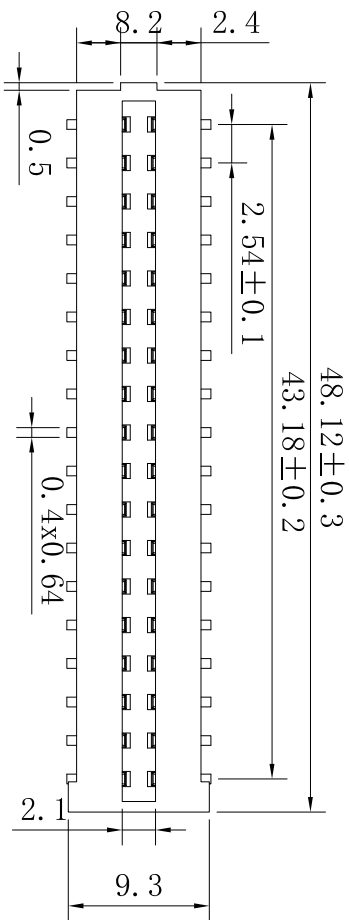

Recommended P.C.Board

Hole layout



Http://www.ciscomm.com

深圳市新世联电子有限公司

TEL: +86 (755) 29912370 FAX: 29912372

Tolerance Unless  
 Otherwise Specified

.X ~ ±0.30

.XX ~ ±0.25

.XXX ~ ±0.20

Angle ~ ± 3°

板对板2.54mm 公端座 立贴 (塑高8.4 塑宽9.3)

Units  
 mm

Scale  
 1:1

REV NO.  
 V0

Material No.  
 XXXXX-XXXXX-XXX-XX

Drawing By

Date

Reviewed By

Date

Approval By  
 Date

LiuYang

2023/02/15