

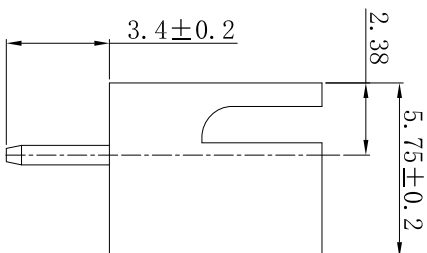


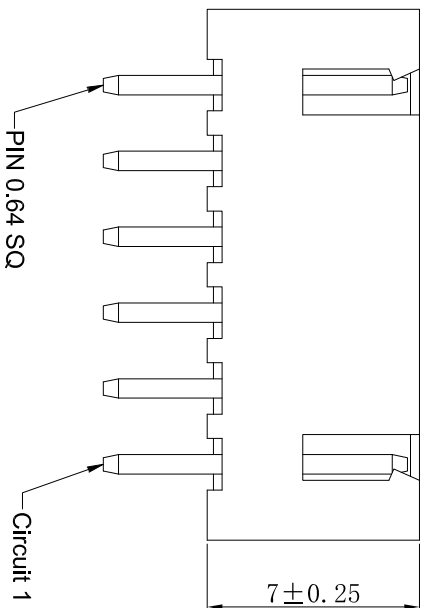

REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/02/15

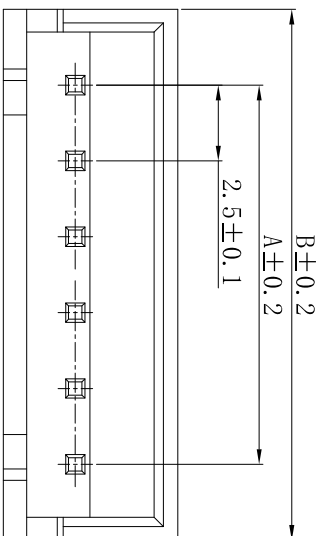

## Ordering Information &amp; Dimensions

PART NO.	Dimensions	
	A	B
A2512WV/A-2P	2.50	7.50
A2512WV/A-3P	5.00	10.00
A2512WV/A-4P	7.50	12.50
A2512WV/A-5P	10.00	15.00
A2512WV/A-6P	12.50	17.50
A2512WV/A-7P	15.00	20.00
A2512WV/A-8P	17.50	22.50
A2512WV/A-9P	20.00	25.00
A2512WV/A-10P	22.50	27.50
A2512WV/A-11P	25.00	30.00
A2512WV/A-12P	27.50	32.50
A2512WV/A-13P	30.00	35.00
A2512WV/A-14P	32.50	37.50
A2512WV/A-15P	35.00	40.00
A2512WV/A-16P	37.50	42.50
A2512WV/A-17P	40.00	45.00
A2512WV/A-18P	42.50	47.50
A2512WV/A-19P	45.00	50.00
A2512WV/A-20P	47.50	52.50

PRODUCT SPECIFICATION:  
insulator:PA66, white ul94v-0  
terminal:brass, tin over 50U NI  
current rating:3Amps/contact max  
contact resistance:  $\leq 10m\Omega$ /contact max  
insulation resistance:  $\geq 1000M\Omega$  at V=100V  
withstanding voltage:250V AC/minute  
operating temperature:-25° C to +85° C

<a href="http://www.cisconn.com">Http://www.cisconn.com</a> 		深圳市新世联电子有限公司 TEL: +86 (755) 29912370 FAX: 29912372	
Tolerance Unless Otherwise Specified		Title	
.X ~ ±0.30		白色针座 2.5间距 1x6P 直针 镀锡	
.XX ~ ±0.25		Units	Scale
.XXX ~ ±0.20	mm	1:1	REV NO.
Angle ~ ± 3°	Drawing By	Date	Reviewed By
	LiuYang	2023/02/15	Date
			Approval By
			Date