

REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/02/15




客户编码

XX-XXX

2Y-8Y	9Y-16Y
A±0.20 B±0.25	A±0.40 B±0.45

Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
02P	2.00	6.00
03P	4.00	8.00
04P	6.00	10.00
05P	8.00	12.00
06P	10.00	14.00
07P	12.00	16.00
08P	14.00	18.00
09P	16.00	20.00
10P	18.00	22.00
11P	20.00	24.00
12P	22.00	26.00
13P	24.00	28.00
14P	26.00	30.00
15P	28.00	32.00
16P	30.00	34.00

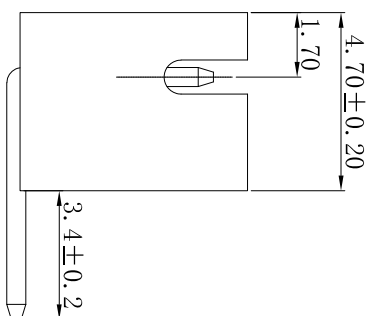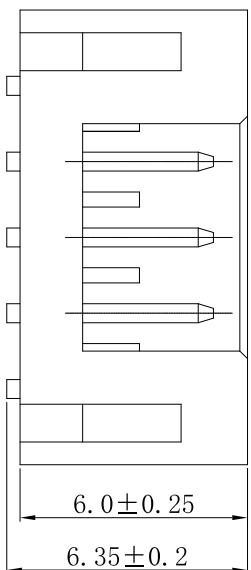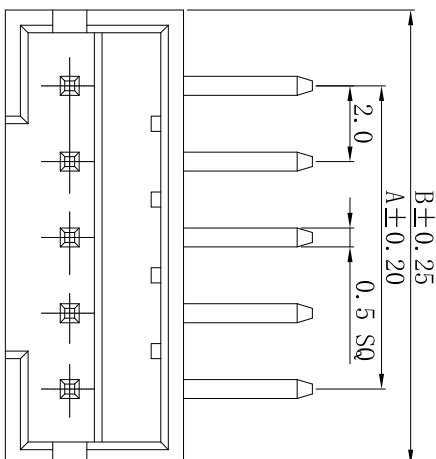

INFORMATION

POLES: 2-16POLES
 PITCH BETWEEN POLES: 2.00MM
 VOLTAGE RATING: 250V AC, DC
 CURRENT RATING: 2.0A
 WITHSTANDING VOLTAGE: 800V AC/MINUTE
 CONTACT RESISTANCE: 30mΩ MAX
 INSULATION RESISTANCE: 1000MΩ MIN
 TEMPERATURE RANGE: -25℃~+85℃
 APPLICABLE WIRE: AWG#32~#24
 MATERIAL: NYLON66 UL94V-0

[Http://www.ciscom.com](http://www.ciscom.com)

 深圳市新世联电子有限公司
 TEL:+86(755)29912370 FAX:29912372
Tolerance Unless
Otherwise Specified

.X ~ ±0.30

.XX ~ ±0.25

.XXX ~ ±0.20

Angle ~ ± 3°

Title

白色针座 PH2.0 1x5P 90° 镀锡



Units

Scale

REV NO.

Material No.

Drawing By

Date

Reviewed By

Date

Approval By

Date

LiuYang

2023/02/15