

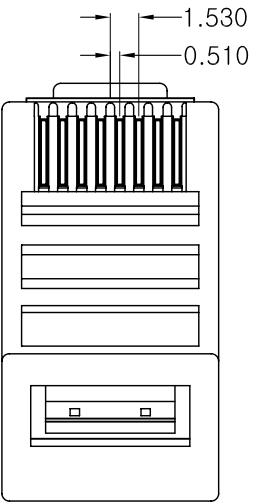
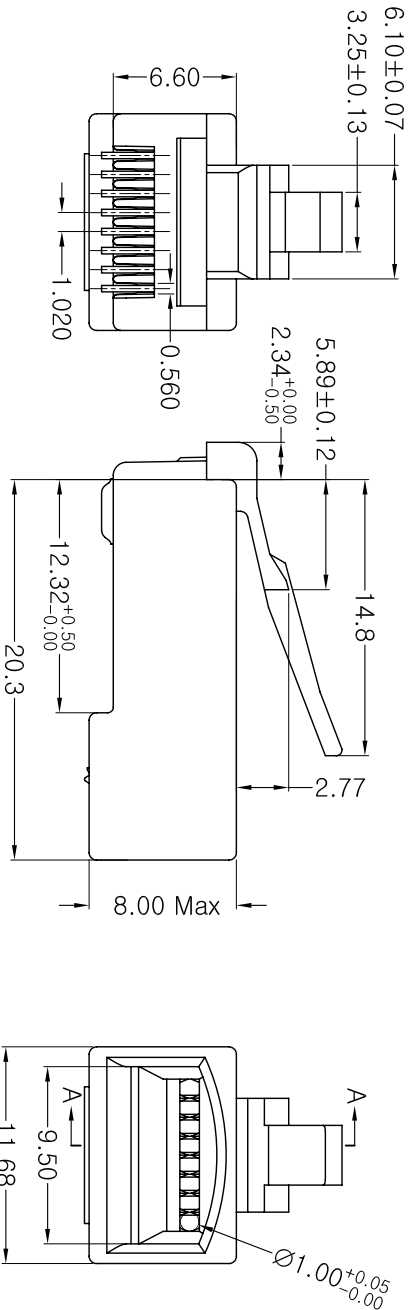


10*3188** **
流水号
膜厚
材质

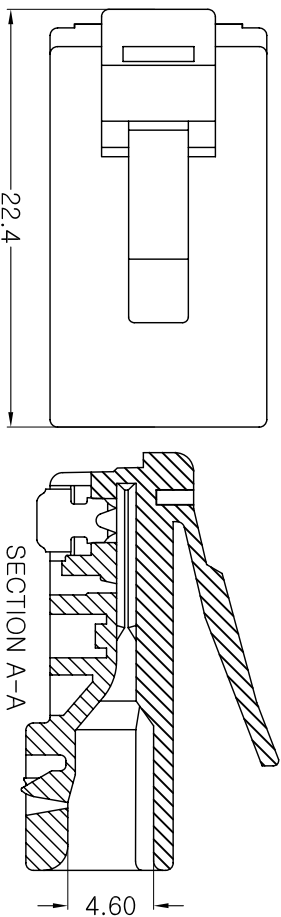

NOTES:

1. Operation Temperature: -40°C ~ +85°C.
2. Electrical Characteristics:
 - 2.1 Rated Current: 125V AC, 1.5A@25°C.
 - 2.2 Contact Resistance: 20mΩ Max.
 - 2.3 Insulation Resistance: 500MΩ Min, 100V DC/min.
 - 2.4 Voltage Proof: 1000V AC/1 minute no breakdown.
3. Mechanical Characteristics:
 - 3.1 Insertion Force & Withdrawal Force: 30N Max.
 - 3.2 Durability: 750 cycles Min.
4. Environmental compliance:
 - 4.1 The products are compliant with the RoHS, and REACH etc.

说明:

1. 使用温度范围: -40°C ~ +85°C.
2. 电气特性:
 - 2.1 电压、电流规格: 125V AC 1.5A@25°C.
 - 2.2 接触电阻: 20mΩ 最大.
 - 2.3 绝缘电阻: 500MΩ 至少 100V DC/分钟.
 - 2.4 耐电压: 1000V AC/分钟, 无击穿.
3. 机械特性:
 - 3.1 插入力&拔出力: 30N 最大.
 - 3.2 耐久性: 750次至少.
4. 环保符合性:
 - 4.1 产品符合RoHS, REACH等环保规格.

深圳市新世联电子有限公司

编号 NO.	名称 NAME	数量 QTY	料号 PART NO.	品名规格 DESCRIPTION	材质 MATERIAL
1	水晶头 Modular Plug	8PCS	20*3188**	2叉 <input type="checkbox"/> 3叉 <input checked="" type="checkbox"/> 3P Prongs G/F" <input type="checkbox"/> 1u" <input type="checkbox"/> 3u" <input type="checkbox"/> 6u" <input type="checkbox"/> 15u" <input checked="" type="checkbox"/> 30u" <input type="checkbox"/> OTHER <input type="checkbox"/> MP8P8C/UTP胶壳/长身/线孔1.00mm	黄铜 <input checked="" type="checkbox"/> Brass 磷铜 <input type="checkbox"/> Phosphor copper
94V-2	94V-0				

产品编号 PRODUCT NO.	品名规格 DESCRIPTION	单位 UNIT	比例 SCALE	图号 DWG NO.	版本 EDIT1	页次 SHEET.
10*3188**	MP8P8C/UTP水晶头/长身/线孔1.00mm	mm	1:1	MP11046	A/0	1/1
材质 MATERIAL	尺寸公差表 DIMENSIONAL TOLERANCE	THIRD ANGLE PROJECTION	核对应 CHECK	日期 DATE	日期 DATE	日期 DATE
X.X	±0.2	第三视角法	刘志文	2017.06.10		
X.XXX	±0.10					
ANGLE	±2°					

版本 EDIT1	变更内容 MODIFICATION	变更日期 UPDATE DATE	签名 SIGNATURE