




REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2019/03/18



INFORMATION
 POLES: 2-16POLES
 PITCH BETWEEN POLES: 2.50MM
 VOLTAGE RATING: 250V AC, DC
 CURRENT RATING: 3.0A
 WITHSTANDING VOLTAGE: 1000V
 AC/MINUTE
 CONTACT RESISTANCE: 30mΩ MAX
 INSULATION RESISTANCE: 1000MΩ MIN
 TEMPERATURE RANGE: -25°C~+85°C
 APPLICABLE WLR: AWG#28~#22
 MATERIAL: NYLON66 UL94V-0

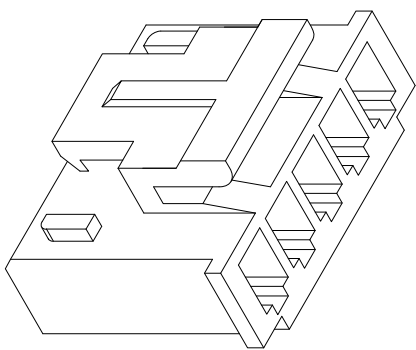

2P

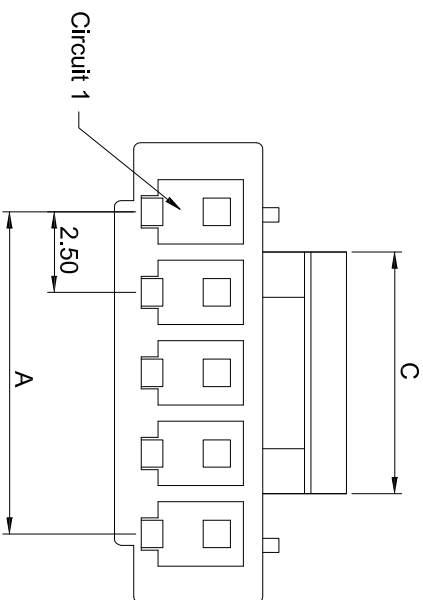

3P~15P

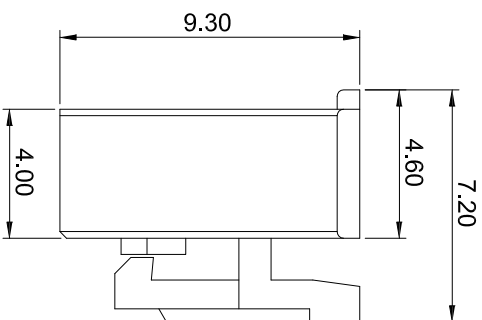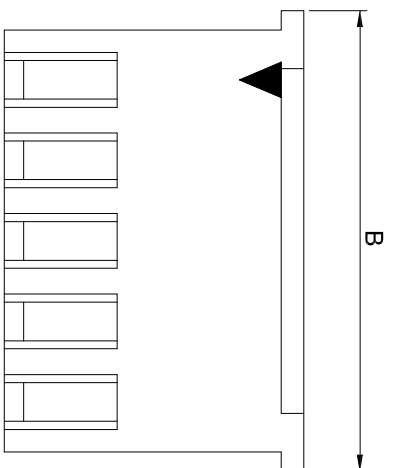

Ordering Information & Dimensions:

PART NO.	Dimensions		
	A	B	C
A2512H-2P	2.50	6.80	5.00
A2512H-3P	5.00	9.30	5.00
A2512H-4P	7.50	11.80	5.00
A2512H-5P	10.00	14.30	7.50
A2512H-6P	12.50	16.80	10.00
A2512H-7P	15.00	19.30	12.50
A2512H-8P	17.50	21.80	15.00
A2512H-9P	20.00	24.30	17.50
A2512H-10P	22.50	26.80	20.00
A2512H-11P	25.00	29.30	22.00
A2512H-12P	27.50	31.80	22.50
A2512H-13P	30.00	34.30	22.50
A2512H-14P	32.50	36.80	25.00
A2512H-15P	35.00	39.30	27.50

Tolerance Unless
Otherwise Specified

.X ~ ±0.30

.XX ~ ±0.25

.XXX ~ ±0.20

Angle ~ ± 3°

Title

Http://www.ciscom.com

深圳市新世联电子有限公司

TEL: +86 (755) 29912370 FAX: 29912372

白色胶壳 XM2.5

Units

mm

Scale

1:1

REV NO.

V0

Material No.

306004-00050

Drawing By

LiuYang

Date

2019/03/18

Reviewed By

Date

Approval By