
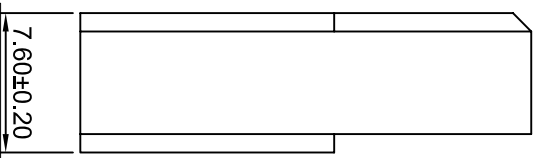
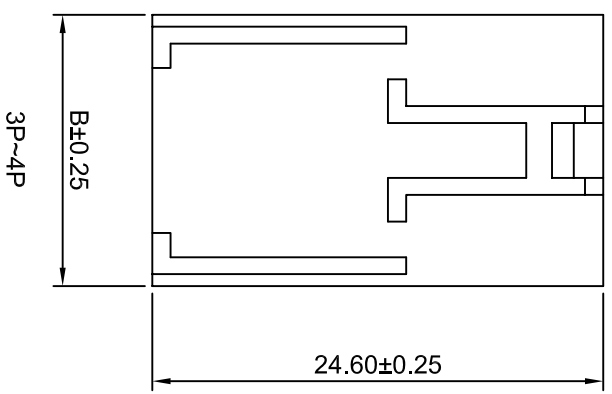
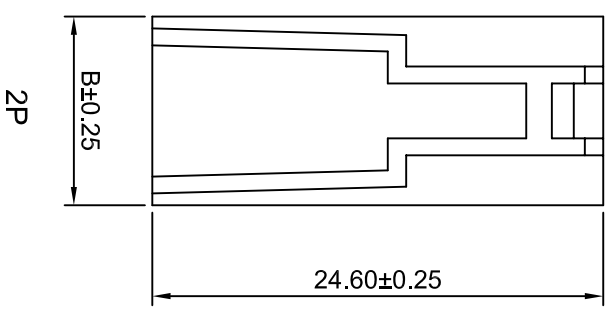
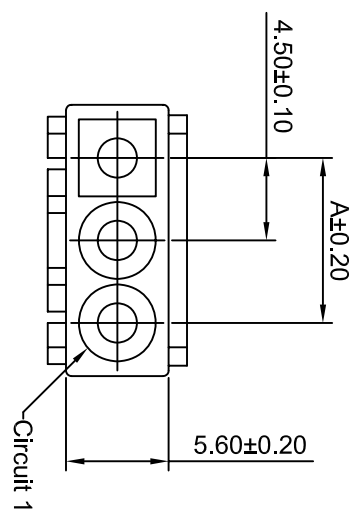


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/06/01

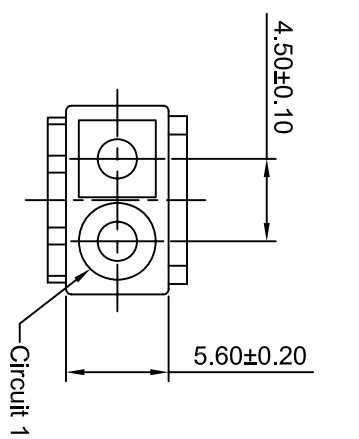

**SPECIFICATIONS:**  
 Current Rating: 19A AC,DC(Max)  
 Voltage Rating: 600V AC,DC  
 Temperature Range: -40°C ~ +105°C  
 Contact Resistance: 3.5mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 5000V AC/minute  
 Material: Nylon 66, UL94V-2(Natural)  
 Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	4.50	10.30	4P	13.50	19.30
3P	9.00	14.80			

[Http://www.ciscomm.com](http://www.ciscomm.com)      深圳市新世联电子有限公司  
 TEL: +86 (755) 29912370      FAX: 29912372

Title		白色胶壳 4.5	
Units	Scale	REV NO.	Material No.
mm	1:1	V0	
Drawing By	Date	Reviewed By	Date
LiuYang	2023/06/01		
Approval By	Date		

Tolerance Unless Otherwise Specified  
 .X ~ ±0.30  
 .XX ~ ±0.25  
 .XXX ~ ±0.20  
 Angle ~ ± 3°