
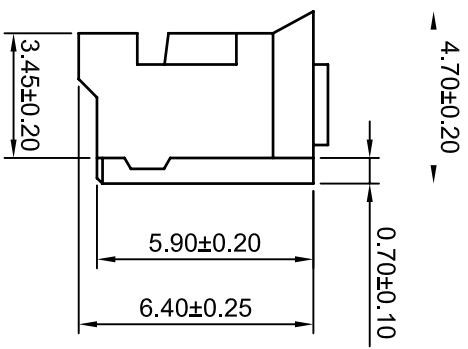
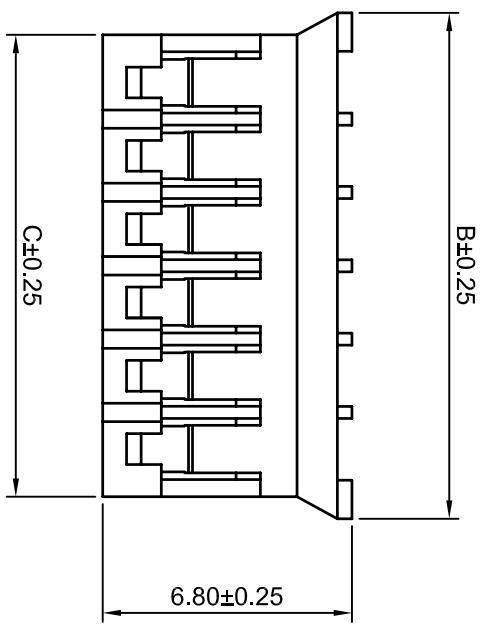

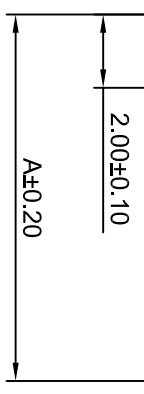


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/06/01

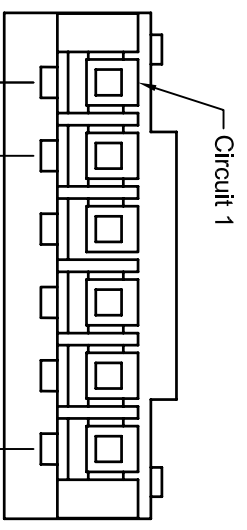

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.00	5.80	4.60	12P	22.00	25.80	24.60
3P	4.00	7.80	6.60	13P	24.00	27.80	26.60
4P	6.00	9.80	8.60	14P	26.00	29.80	28.60
5P	8.00	11.80	10.60	15P	28.00	31.80	30.60
6P	10.00	13.80	12.60	16P	30.00	33.80	32.60
7P	12.00	15.80	14.60	17P	32.00	35.80	34.60
8P	14.00	17.80	16.60	18P	34.00	37.80	36.60
9P	16.00	19.80	18.60	19P	36.00	39.80	38.60
10P	18.00	21.80	20.60	20P	38.00	41.80	40.60
11P	20.00	23.80	22.60				

Ordering Information & Dimensions

SPECIFICATIONS:
 Current Rating: 2A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance: 10mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 800V AC/minute
 Material: Nylon 66, UL94V-0 (White)

ciscom

深圳市新世联电子有限公司

Http://www.ciscom.com TEL: +86 (755) 29912370 FAX: 29912372

Title		Units		Scale		REV NO.		Material No.	
Tolerance Unless Otherwise Specified		mm		1:1		V0			
.X ~ ±0.30									
.XX ~ ±0.25									
.XXX ~ ±0.20		Date		Reviewed By		Date		Approval By	
Angle ~ ± 3°		LiuYang		2023/06/01					

