



REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2019/03/23

客户编码	ZM-001
------	--------

SPECIFICATIONS:  
 Current Rating: 2A AC, DC  
 Voltage Rating: 250V AC, DC  
 Temperature Range: -40° C ~ +105° C  
 Contact Resistance: 10mΩ Max.  
 Insulation Resistance: 1000M\ Min.  
 Withstanding Voltage: 800V AC/minute  
 Material: Nylon 66, UL94V-0 (White)

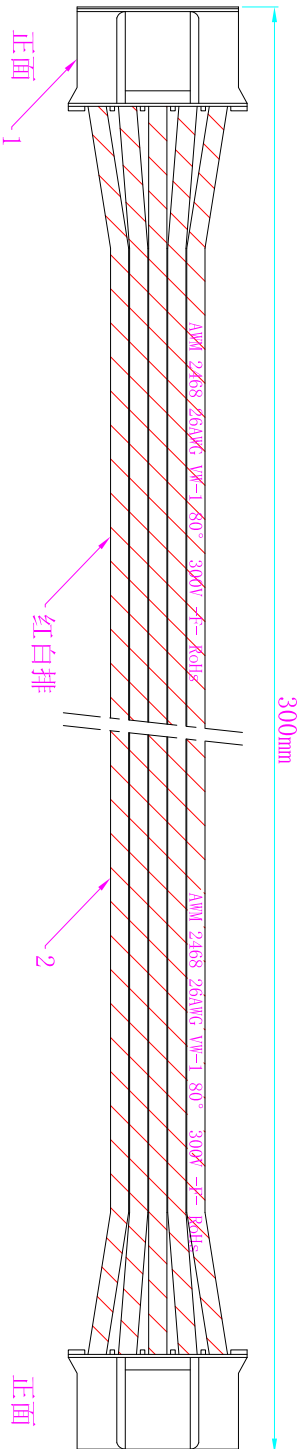

序号	物料名称	型号/规格	单位	数量	备注
2	红白排线	UL 2468 26AWG 红白排线	根	1	
1	连接器	PH2.0 5P 白色胶壳	PCS	2	配PH2.0端子
					4

 <a href="http://www.ciscomm.com">Http://www.ciscomm.com</a>		深圳市新世联电子有限公司 TEL: +86 (755) 29912370 FAX: 29912372	
Tolerance Unless Otherwise Specified		Title UL红白排线 L=300mm 两端PH2.0-5P白色胶壳 (正对正)	
.X ~ ±0.30		Units mm	Scale 1:1
.XX ~ ±0.25		Date	REV NO. V0
.XXX ~ ±0.20	Angle ~ ± 3°	Drawing By ChenShan	Date 2019/03/23
		Reviewed By	Date
		Material No. 19C-5PY300-00	Approval By
			Date