

| | | | |
|----------|---------------|---------|------------|
| REV. NO. | REVISION NOTE | REVISER | DATE |
| V0 | NEW DRAWING | | 2023/06/01 |

4


3

2


1

| | | |
|------|------|----|
| 物料编码 | L/mm | 备注 |
| | 100 | |

| 接线方法 | |
|------|------------|
| 颜色 | C1301HF-3P |
| 蓝 | 1 |
| 棕 | 2 |
| 黄绿 | 3 |

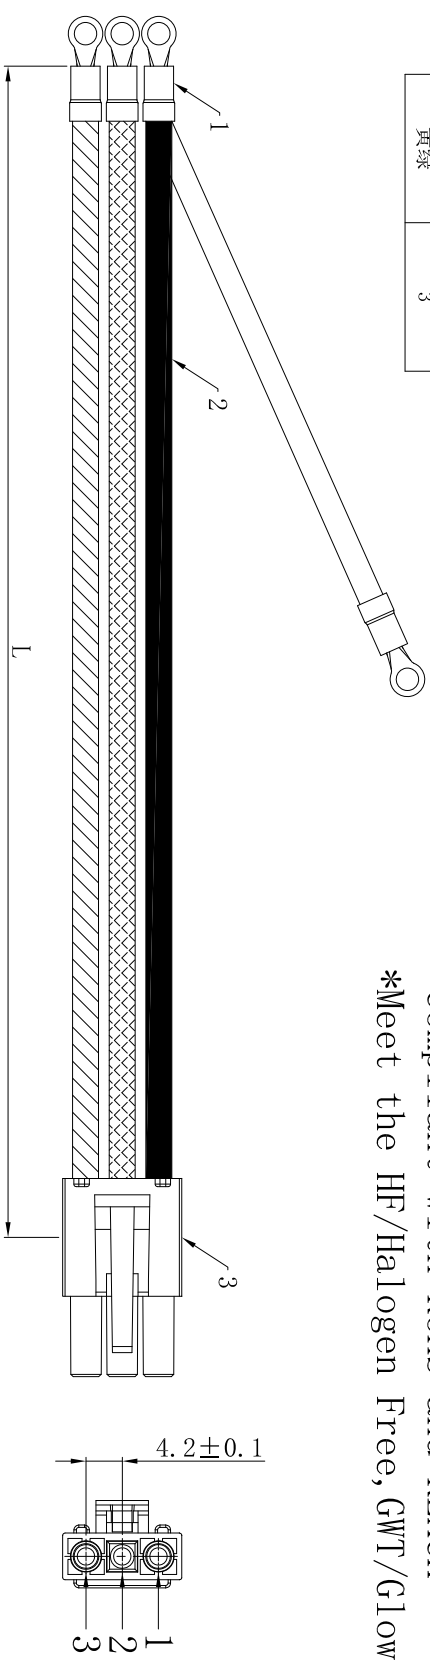

Current rating: 10A AC, DC
Voltage rating: 300V AC, DC
Temperature range: -40° C ~ +105° C
Contact resistance: 7mΩ Max.
Insulation resistance: 1000MΩ Min.
Withstanding voltage: 1500V AC/minute
Compliant with RoHS and REACH
*Meet the HF/Halogen Free, GWT/Glow wire

| | | | |
|---|----|--|------------|
|  | | 深圳市新世联电子有限公司 TEL.: +86 (755) 29912370 FAX: 29912372 | |
| Http://www.ciscomm.com | | Title | |
| Tolerance Unless Otherwise Specified | | Units | |
| .X ~ ±0.30 | mm | Scale | REV NO. |
| .XX ~ ±0.25 | mm | 1:1 | V0 |
| .XXX ~ ±0.20 | mm | Reviewed By | Date |
| Angle ~ ± 3° | | ChenShan | 2023/06/01 |
| Drawing By | | Date | |
| Date | | Reviewed By | |
| Date | | Date | |
| Date | | Date | |

A

B

C

D

4

3

2

1

A

B

C

D