

REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/06/01

4


3

2

1

物料编码	L/mm	备注
	100	

接线方法	
颜色	C1301HF-3P
白	1
黑	2
绿	3

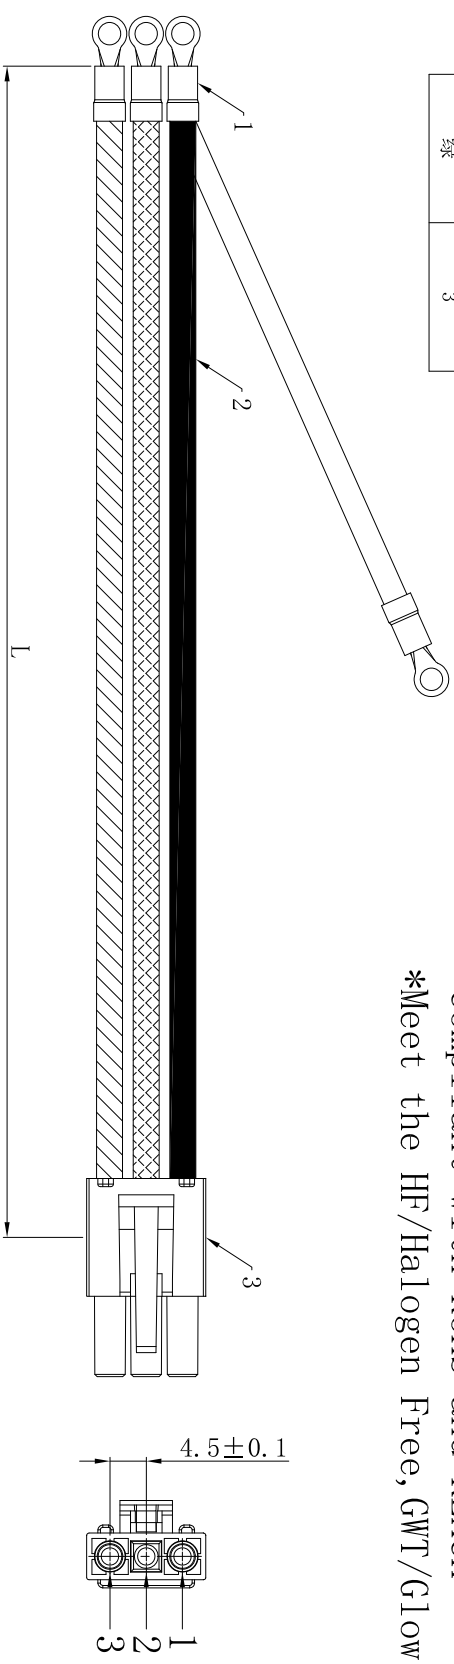

Current rating: 8A AC, DC
 Voltage rating: 300V AC, DC
 Temperature range: -40° C ~ +105° C
 Contact resistance: 7mΩ Max.
 Insulation resistance: 1000MΩ Min.
 Withstanding voltage: 1500V AC/minute
 Compliant with RoHS and REACH
 *Meet the HF/Halogen Free, GWT/Glow wire

		深圳市新世联电子有限公司	
Http://www.ciscomn.com		TEL: +86 (755) 29912370 FAX: 29912372	
Tolerance Unless Otherwise Specified	Title	Units	Scale
.X ~ ±0.30	C1301HF 公头 UL1007 18AWG L=100mm 支线	mm	1:1
.XX ~ ±0.25		REV NO.	
.XXX ~ ±0.20		V0	
Angle ~ ± 3°	Drawing By 设计人	Date 2023/06/01	Reviewed By
			Date
			Approval By
			Date

A

B

C

D

4

3

2

1

A

B

C

D