
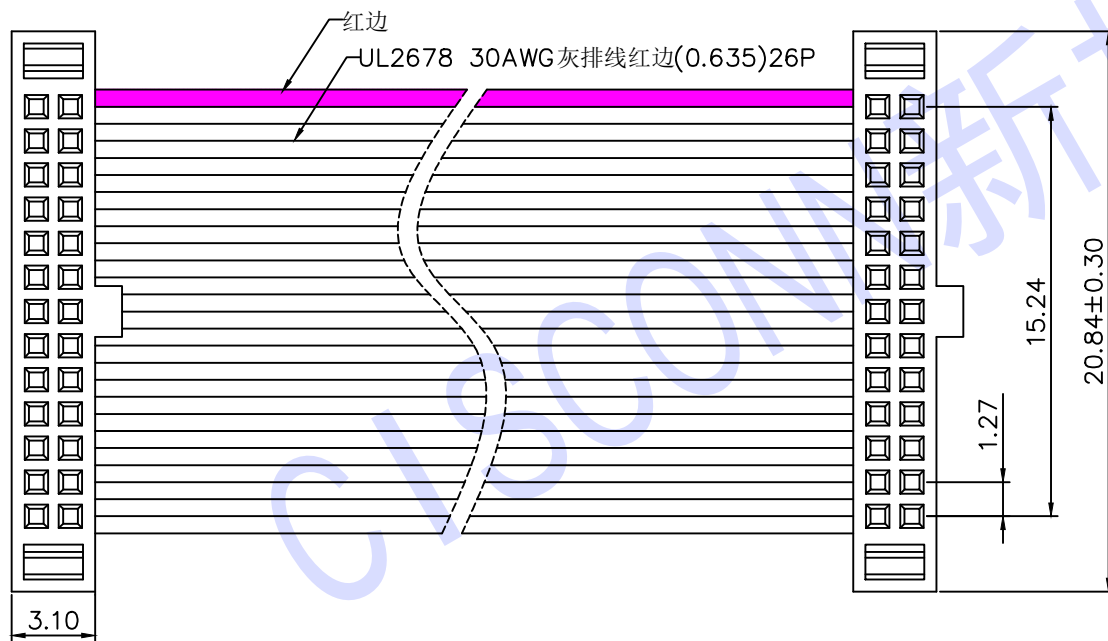
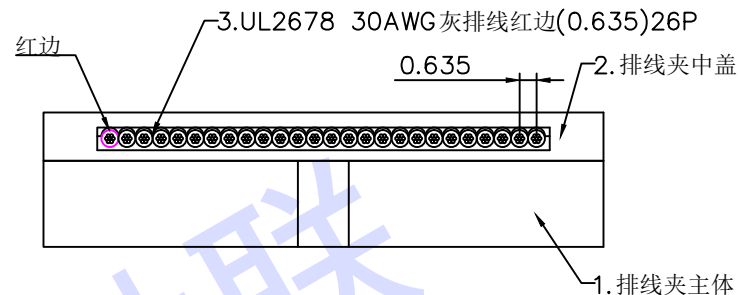


客户编码 联建光电

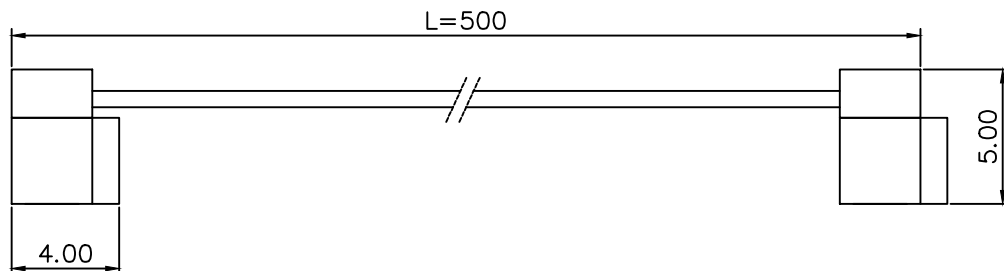

排线夹  
 材质: PBT环保  
 端子: 青铜  
 额定电流: 1Amp  
 最大耐受电压: AC 500V/1Minute  
 绝缘电阻: 1000mΩ Min, 在DC 500V时  
 接触电阻: 15mΩ Max

排线  
 ● 额定温度: 105℃  
 ● 额定电压: 150V  
 ● 参考标准: UL758, UL1581  
 ● 导体使用绞合30AWG镀锡/裸铜  
 ● PVC绝缘

E			Units	mm	Scale	4:1	Drawing By	Date	CISCONN®	深圳市新世联电子有限公司			
D			Tolerance Unless Otherwise Specified			Job Lin	2016/10/26	http://www.cisconn.com			TEL: +86(755)29912370 FAX: 29912372		
C						Reviewed By	Date	Date	2016/10/26	Title			
B			.X ~ ±0.30					Sheet	1 of 1	PH1.27mm 成品灰色排线(红边)26P L=500mm 排线头黑色弹片型			
A	RELEASED	2013/03/16	.XX ~ ±0.25			Approval By		Date	Third Angle Projection		Drawing No.		
REV	ECN.NO.	Date	.XXX ~ ±0.20							Drawing No.			
			Angle ~ ±3°							Material No.	33100-0332	REV	A