

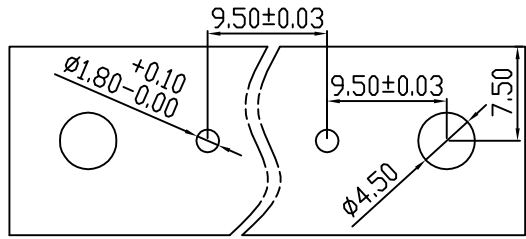
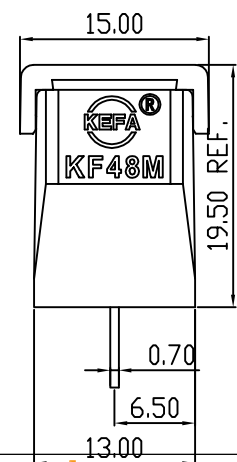
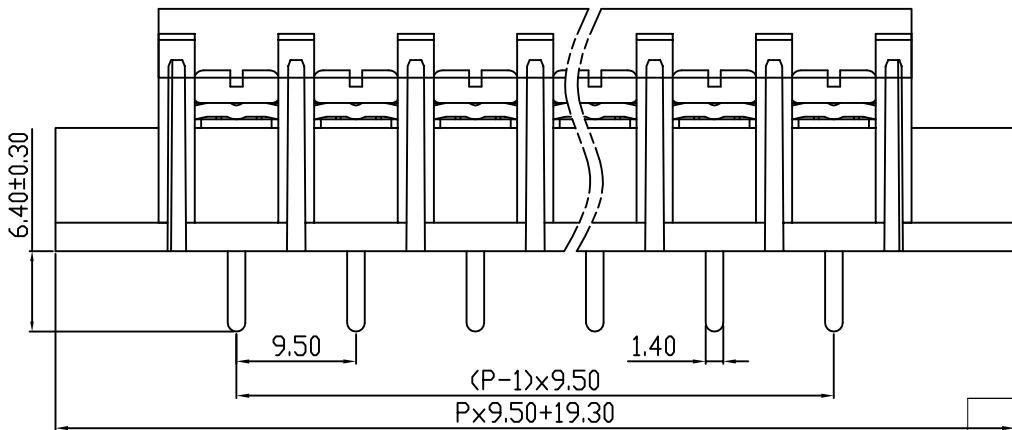


linear dimension(Tolerances Standard GB/T 14486-2008)								— ▯ ⊥		
variable range	to 6	over 6	over 10	over 30	over 60	over 100	over 160	to 10	over 10	over 100
		to 10	to 30	to 60	to 100	to 160	to 100		to 100	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60



PCB LAYOUT

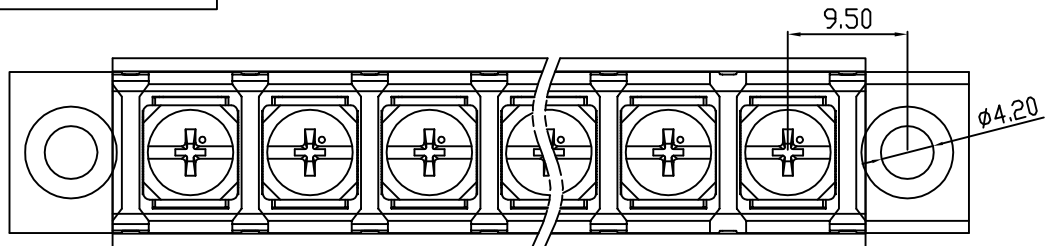

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.12.10

UL/CUL 技术参数		UL/CUL Technical Data					
等级	Use Group						
额定电压	Rated Voltage [V]	300	-	-			
额定电流	Rated Current [A]	20	-	-			
接线范围	Wire Range						
单/多芯线	Solid/Stranded [AWG]				22-12		
IEC 技术参数		IEC Technical Data					
额定电压	Rated Voltage [V]						
额定电流	Rated Current [A]	32					
耐电压	Withstanding Voltage	3000V/1Min					
导线截面积	Conductor cross section				4.0		
硬质/柔性导线	Solid/flexible [mm ²]						
材料		Material					
绝缘材料	Insulation Material	PA66					
阻燃等级	Imflammability	UL94V-0					
导体材料	Contacting Material	铜合金 Copper alloy					
导体表面镀层	Contactive Coating	镀锡 Tin plated					
一般参数		Other Data					
间距	Pitch [mm]	9.5					
极数	Poles [P]	02-24					
剥线长度	Stripping Length [mm]	-					
螺丝	Screw/扭矩 Torque(Max) [N.m]	M4/1.0					
工作温度	Operating temperatur [°C]	-40~+105					
引针尺寸	Pin Dimensions [mm]	6.4					
PCB板孔径	PCB Hole Diameter [mm]	1.8					

Tolerance Unless Otherwise Specified		Title		9.5mm间距 栅栏式接线端子加盖			
.X ~ ±0.30		Units mm	Scale 1:1	REV NO. V0	Material No.		
.XX ~ ±0.25							
.XXX ~ ±0.20	Drawing By	Date	Reviewed By	Date	Approvai By	Date	
Angle ~ ± 3°	LiuYang	2023/06/01					



深圳市新世联电子有限公司
TEL:+86(755)29912370 FAX:29912372