
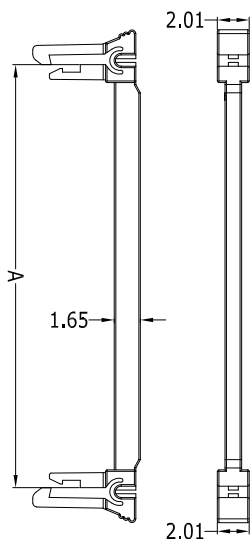


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/02/15

客户编码

XX-XXX

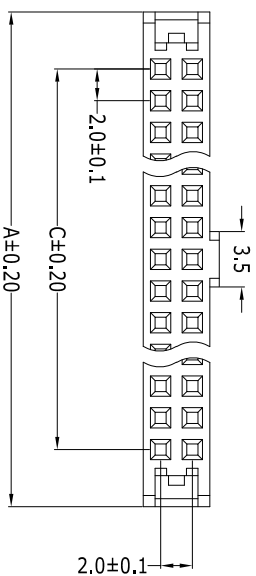

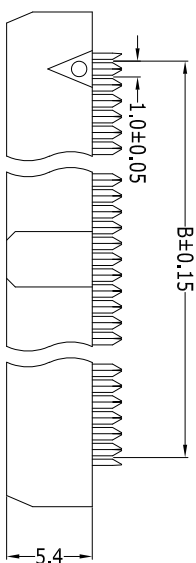

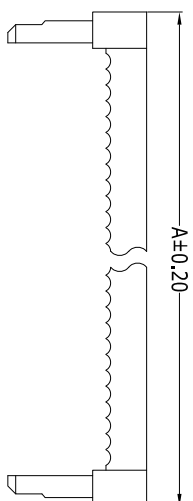
**Electrical Data:**

Current rating: 2Amps  
 Dielectric Withstanding Voltage: 1000VAC for one minute  
 Contact Resistance: < 30 mΩ  
 Insulation Resistance: > 1000 MΩ  
 Operating Temperature: -40°C ~ +105°C

**Construction:**

Insulator: Glass Filled Polyester  
 Flammability Rating: UL 94V-0  
 Contacts: Phosphor Bronze of copper alloy  
 Contacts plating: Selective gold on surface contact area

Standard: PBT

**备注:**

- 1、A= 2.00 X No. of Positions + 5.2
- 2、B= 2.00 X No. of Contacts - 1.0
- 3、C= 2.00 X No. of Contacts - 2.0
- 4、材质: PBT 颜色: 黑色
- 5、端子触点表层镀金2U

4

3

2

1

<a href="http://www.ciscomn.com">Http://www.ciscomn.com</a>				深圳市新世联电子有限公司 TEL: +86 (755) 29912370 FAX: 29912372	
Tolerance Unless Otherwise Specified		Title		PH2.00 排线头三件式 蝴蝶扣	
.X ~ ±0.30			Units	Scale	REV NO.
.XX ~ ±0.25			mm	1:1	V0
.XXX ~ ±0.20			Date	Reviewed By	Date
Angle ~ ± 3°			Liuyang	2023/02/15	Approval By
					Date

A

B

打印日期:2023/6/9 10:31:46

B

C

D

A