



REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/02/15

客户编码



XX-XXX

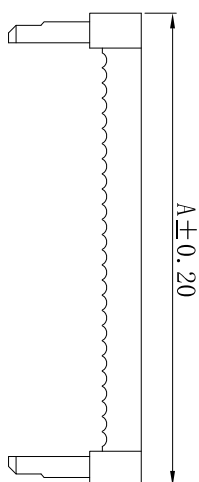

B ± 0.15

**Construction:**


Insulator: Glass Filled Polyester  
 Flammability Rating: UL 94V-0  
 Contacts: Phosphor Bronze of copper alloy  
 Contacts plating: Selective gold on surface contact area  
 Standard: PBT

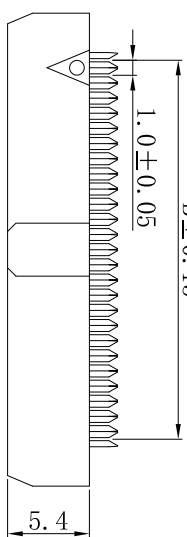

1.0 ± 0.05

5.4

0.6

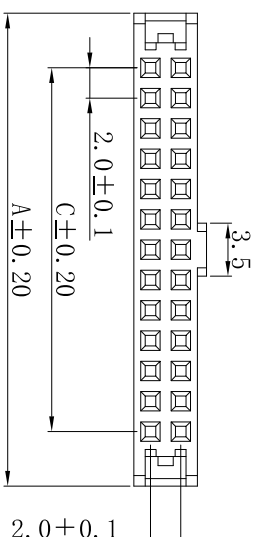

2.0 ± 0.1

<a href="http://www.ciscomn.com">Http://www.ciscomn.com</a>				深圳市新世联电子有限公司 TEL: +86 (755) 29912370 FAX: 29912372	
Tolerance Unless Otherwise Specified		Title		PH2.00 排线头二件式	
.X ~ ±0.30			Units	Scale	REV NO.
.XX ~ ±0.25			mm	1:1	V0
.XXX ~ ±0.20			Date	Reviewed By	Date
Angle ~ ± 3°			Liuyang	2023/02/15	Approval By
					Date

- 备注:
- 1、A= 2.00 X No. of Positions + 5.2
  - 2、B= 2.00 X No. of Contacts - 1.0
  - 3、C= 2.00 X No. of Contacts - 2.0
  - 3、胶壳用常规标准胶壳, 2xNo. of Contacts
  - 4、材质: PBT 颜色: 黑色
  - 5、端子触点表层镀金2U