


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/02/15

客户编码

XX-XXX

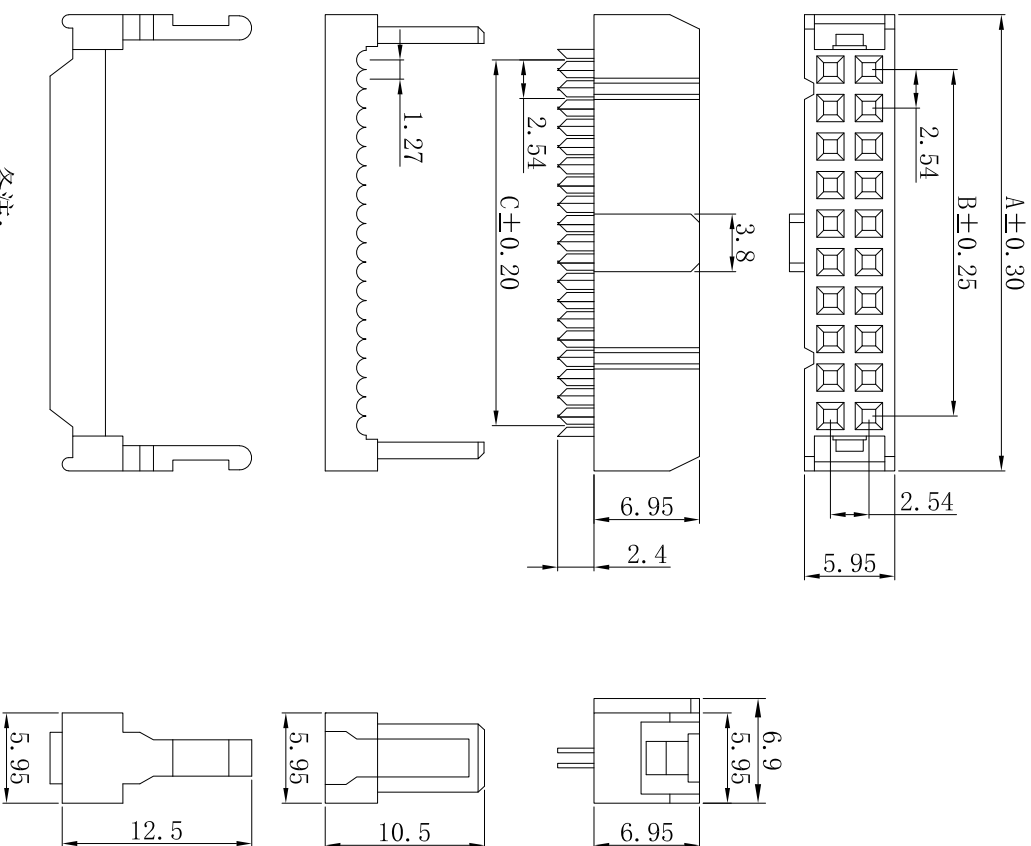

备注:

- 1、A= 2.54 X No. of Positions + 4.7
- 2、B= 2.54 X No. of Contacts - 2.54
- 3、C= 2.54 X No. of Contacts - 1.27
- 4、材质: PBT 颜色: 黑色
- 5、端子触点表层镀金2U

Electrical Data:
 Current rating: 1Amps
 Dielectric Withstanding Voltage:
 1000VAC for one minute
 Contact Resistance: < 30 mΩ
 Insulation Resistance: > 1000 MΩ
 Operating Temperature: -40°C ~ +105°C

Construction:

Insulator: Glass Filled Polyester
 Flammability Rating: UL 94V-0
 Contacts: Phosphor Bronze of copper alloy
 Contacts plating: Selective gold on surface contact area

Standard: PBT

4

3

2

1

Http://www.ciscomn.com				深圳市新世联电子有限公司 TEL:+86(755)29912370 FAX:29912372	
Tolerance Unless Otherwise Specified		Title		PH2.54 排线头三件式	
.X ~ ±0.30		Units	Scale	REV NO.	Material No.
.XX ~ ±0.25		mm	2:1	V0	XXXX-XXXX-XX-XX
.XXX ~ ±0.20		Date	Reviewed By	Date	Approval By
Angle ~ ± 3°		LiuYang	2023/02/15		