



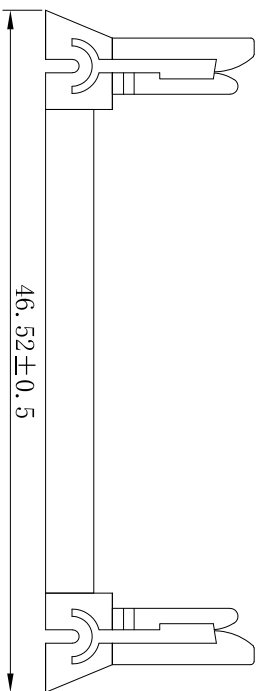
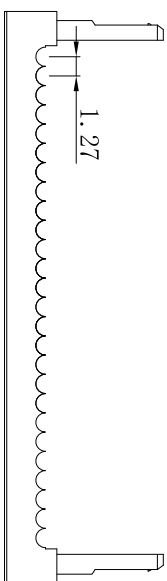
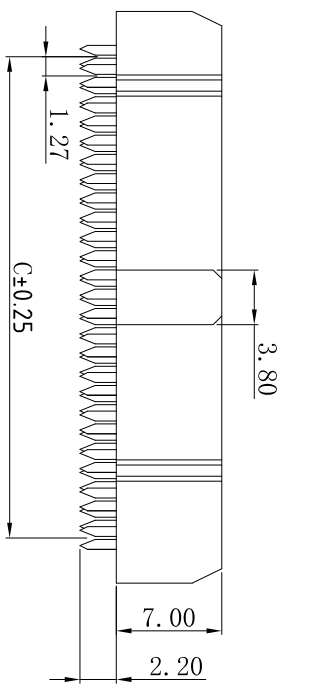


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2022/07/21

客户编码

XX-XXX

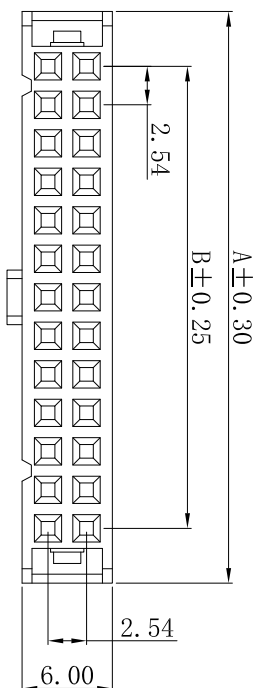

备注:

- 1、A= 2.54 X No. of Positions + 4.7
- 2、B= 2.54 X No. of Contacts - 2.54
- 3、C= 2.54 X No. of Contacts - 1.27
- 3、胶壳用常规标准胶壳, 2XNo. of Contacts
- 4、材质: PBT 颜色: 黑色
- 5、端子触点表层镀金2U

Electrical Data:

Current rating: 1Amps
 Dielectric Withstanding Voltage:
 1000VAC for one minute
 Contact Resistance: < 30 mΩ
 Insulation Resistance: > 1000 MΩ
 Operating Temperature: -40°C ~ +105°C

Construction:

Insulator: Glass Filled Polyester
 Flammability Rating: UL 94V-0
 Contacts: Phosphor Bronze of copper alloy
 Contacts plating: Selective gold on surface contact area

Standard: PBT

[Http://www.ciscom.com](http://www.ciscom.com)


深圳市新世联电子有限公司
 TEL: +86 (755) 29912370 FAX: 29912372

Tolerance Unless Otherwise Specified		Title		Units		Scale		REV NO.		Material No.	
.X	~ ±0.30	2.54 2x13P 黑色 排线头三件式+蝴蝶扣		mm	1:1	V0	XXXX-XXXX-XXX-XX				
.XX	~ ±0.25	Drawing By	Date	Reviewed By	Date	Approval By	Date				
.XXX	~ ±0.20	LiuYang	2022/07/21								
Angle	~ ± 3°										