


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/02/15

客户编码

XX-XXX



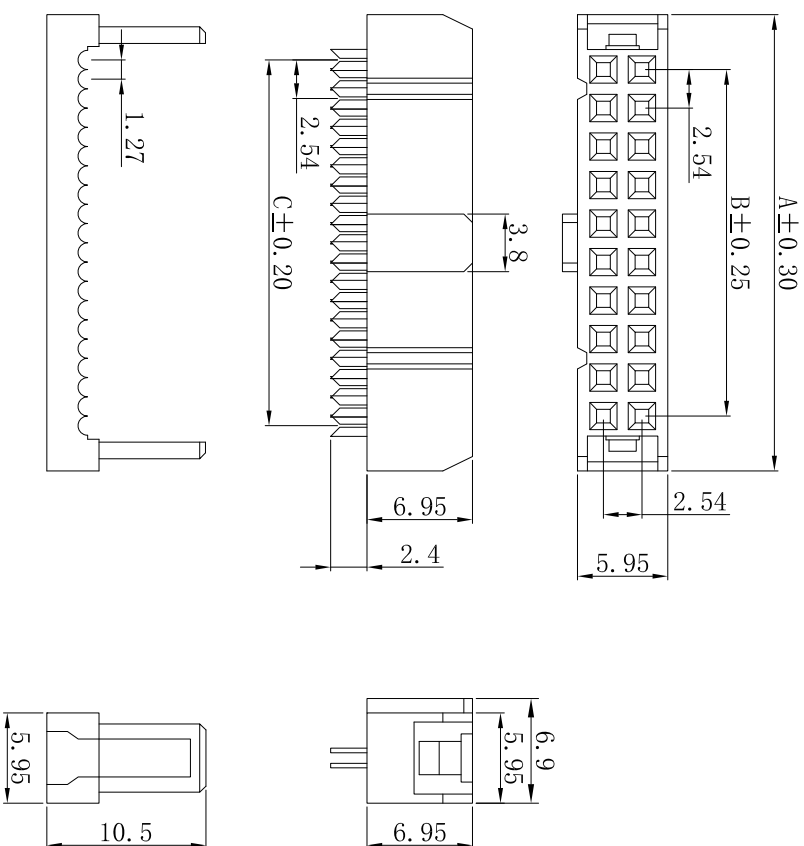

Electrical Data:
 Current rating: 1Amps
 Dielectric Withstanding Voltage:
 1000VAC for one minute
 Contact Resistance: < 30 mΩ
 Insulation Resistance: > 1000 MΩ
 Operating Temperature: -40°C ~ +105°C

Construction:

Insulator: Glass Filled Polyester
 Flammability Rating: UL 94V-0
 Contacts: Phosphor Bronze of copper alloy
 Contacts plating: Selective gold on surface contact area

Standard: PBT

- 备注:
- 1、A= 2.54 X No. of Positions + 4.7
 - 2、B= 2.54 X No. of Contacts - 2.54
 - 3、C= 2.54 X No. of Contacts - 1.27
 - 3、胶壳用常规标准胶壳, 2XNo. of Contacts
 - 4、材质: PBT 颜色: 黑色
 - 5、端子触点表层镀金2U

		深圳市新世联电子有限公司	
Http://www.ciscomm.com		TEL:+86(755)29912370 FAX:29912372	
Tolerance Unless Otherwise Specified	Title	PH2.54 排线头二件式	
.X ~ ±0.30		Units	Scale
.XX ~ ±0.25		mm	2:1
.XXX ~ ±0.20	Drawing By	Date	Reviewed By
Angle ~ ± 3°	LiuYang	2023/02/15	
			Date
			Approval By
			Date
			Material No.
			XXXXX-XXXXX-XXX-XX