
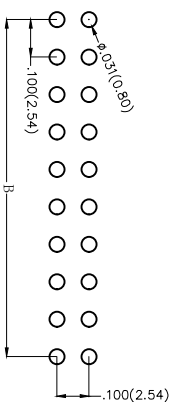
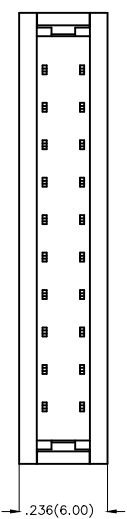


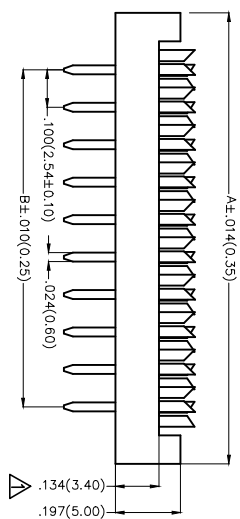


REV. NO.	REVISION NOTE	REVISER	DATE
V0	NEW DRAWING		2023/02/15

客户编码

XX-XXX

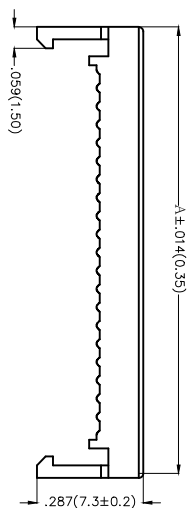

### Recommended P.C. Board Layout

#### 备注:

- 1、A= 2.54 X No. of Positions + 4.7
- 2、B= 2.54 X No. of Contacts - 2.54
- 3、C= 2.54 X No. of Contacts - 1.27
- 3、胶壳用常规标准胶壳, 2xNo. of Contacts
- 4、材质: PBT 颜色: 黑色
- 5、端子触点表层镀金2U



#### Electrical Data:

Current rating: 2 Amps  
 Dielectric Withstanding Voltage:  
 1000VAC for one minute  
 Contact Resistance: < 30 mΩ  
 Insulation Resistance: > 1000 MΩ  
 Operating Temperature: -40°C ~  
 +105°C

#### Construction:

Insulator: Glass Filled Polyester  
 Flammability Rating: UL 94V-0  
 Contacts: Phosphor Bronze of  
 copper alloy  
 Contacts plating: Selective gold on  
 surface contact area

Standard: PBT

		深圳市新世联电子有限公司	
Http://www.ciscomm.com		TEL: +86 (755) 29912370 FAX: 29912372	
Tolerance Unless Otherwise Specified	Title	PH2.54 排线头	
.X ~ ±0.30		Units	Scale
.XX ~ ±0.25		mm	2:1
.XXX ~ ±0.20	Drawing By	Date	Reviewed By
Angle ~ ± 3°	LiuYang	2023/02/15	
		REV NO.	Material No.
		V0	XXXXX-XXXXX-XXX-XX
		Date	Approval By
			Date